



NATIONAL ARCHIVES OF IRELAND

NAI/PLIC/1

Archives are subject to copyright and should not be copied or reproduced
without the written permission of the Director of the National Archives

ES for gas meter

deducted for gas loss

Property Losses (Ireland) Committee, 1916.

51 ST. STEPHEN'S GREEN, DUBLIN,

June, 1916.

Sir,

In connection with your application in this matter, I now beg to enclose a form of claim which, on completion, should be returned to me.

Your obedient Servant,

J. J. HEALY,

Secretary.

4815

Noble's Ltd.

PLIC/1/4264

REPORTED ON BY COMMITTEE.

[17.NOV.1916]

24

ROONEY & CO.
SOLICITORS.

PATRICK ROONEY,
COMMISSIONER FOR OATHS.

TELEPHONE 4042.

(TEMPORARY ADDRESS)

14 UPPER ORMOND QUAY,
DUBLIN.

4th December 1916

Re/ Noblett

Dear Sir,

Yours of the 1st instant to hand with
4 Policies of Insurance as stated therein for which
we are much obliged.

Truly yours,

Patrick Rooney

Mr. Sheehan.

1699

4874

4875

Rto G 15th 19th list

J. J. Healy Esq.,

Secretary,

Property & Losses Committee,

51, Stephens Green.

Assessors Report. 28th Octr 1916

Claim No. 4815 Name of Claimant Stephen Noblett & Sidney Stanley Dawson
Directors of Messrs Noblett Ltd.,
Confectioners.
 Situation of Property 34 Lower Sackville Street, Dublin.

Description	Claim	Insurance (if any)	Commissioners Valuation of Buildings	Assessors Valuation of full Damage	Loss Payable on basis of Insurance	Excess of Loss over and above amount payable under the Policies
Building (Basement & Ground Floor only)	1259: 6:5	300	168	700	300	400
Fittings, Mirrors, Show-cases, &c	585: 4:7 (See Report on Contents Loss)					
Gas Meter	5: 0:0		- do -	5		
Electric Meter	7: 0:0		- do -	7		
<div style="font-family: cursive; font-size: small; margin-left: 20px;"> For Contents ^{el.} no 4815 see 1914 Cont. No. 377 </div>						
TOTALS, £	1856:11:0	300	168	700	300	400

The Building and Contents were completely destroyed by Fire.

Interests in the buildings Claimants are Lease-holders.

Landlord:- Thomas O'Farrell, of "Bella Vista", Killiney.

The Insurance Policy is in Names of :- Messrs Noblett Ltd, The London City & Midland Bank Ltd, and Thomas O'Farrell.

No special circumstance to report as regards under-insurance.

Walter James & Co

Award of Committee: Contents 700 WJ

do. Buildings

REPORTED ON BY COMMITTEE.

DETAILED CLAIM FOR

PROPERTY DESTROYED DURING

THE REBELLION, APRIL, 1916.

AT

NO. 34 LOWER SACKVILLE STREET

DUBLIN.

FOR MESSRS. NOBLETT'S LTD.

HOUGHTON STREET

LIVERPOOL.

ARCHITECTS.

CALDBECK & DUNLOP, M.M.R.I.A.I.

8 SAINT ANDREW STREET,

DUBLIN.

SURVEYOR.

FRANCIS S. HALL F.S.I.

8 WESTMORELAND STREET,

DUBLIN.

AUGUST, 1916.

BILL OF QUANTITIES OF WORK REQUIRED TO
BE DONE IN REBUILDING WALLS, ETC. AND
REINSTATING FRONT AND SHOP FITTINGS TO
BASEMENT AND GROUND FLOOR OF NO. 34
LOWER SACKVILLE STREET, DUBLIN
DESTROYED DURING THE REBELLION OF
APRIL 1916.

FOR MESSRS. NOBLETT, LIMITED,

HOUGHTON STREET,

LIVERPOOL.

ARCHITECTS,

MESSRS. CALDERCK & DUNLOP, M.M.R.I.A.I.,

2, SAINT ANDREW STREET,

DUBLIN.

SURVEYOR,

FRANCIS S. HALL, F.S.I.,

8, WESTMORELAND STREET,

DUBLIN.

August, 1916.

PRELIMINARIES.

Item. Allow for all scaffolding, plant and
tackle required for the carrying out of
the several works and erecting same and
taking down at completion.

Mil. " " "

" Provide, erect and maintain close
sheet hoarding having planted footway
with handrail at side and projecting
hoods for protection of foot passengers
for a total length of 47 feet exclusive

25/- 25-0-0.

Forward

£ 25-0-0.

No. 34 Lower Sackville Street.

		<u>Brought Forward</u>	£ 25-0-0
	of returns, with strong sheeted gates hinged to posts and fitted with locking arrangement and taking down at completion and pay all charges to the corporation in connection with same.		" " " "
Item.	Provide for the proper protection of works during the carrying out until completion, and for watching and lighting of works as required from time to time.	7/10/-	7-10-0.
"	Provide for proper latrine accommodation for workmen, also for necessary storage sheds for materials and for Foreman's Office, fitted with desk and drawers.	10/-	10-0-0.
"	Provide for temporary Office for The Clerk of Works, and fittings in same and necessary attendance, fire and light. (Proportional cost to this section of whole contract).	5/-	5-0-0.
"	Provide for temporary latrine and other accommodation for the Clerk of Works. (Proportional cost as before described).	1/-	1-0-0.
"	Provide for Salary for Clerk of Works at £3:10:0 per week for this section. 8 weeks.	3/10/-	28-0-0.
"	Provide for serving all notices on the Corporation Authorities and for paying all Fees and Charges legally demanded by them.	10/-	10-0-0.
"	Provide for serving all notices on adjoining owners, and for making good any	3/-	3-0-0.
<u>Forward</u>		£	80-0-0.

	<u>Brought Forward</u>	\$	80	0	0
Item	damages caused to adjoining premises and indemnifying Employers from any claims arising in connection with same.	}	"	"	"
	Provide for preparation of Plans and Specification and other documents to be lodged with the Corporation.	}	3/-	3	0 0
"	Provide for complete set of drawings and specification for the use of The Contractor.	}	2/-	2	0 0
"	Allow for Corporation costs and charges in connection with pulling down damaged buildings.	}	9/12/11	9	12 11
"	Allow for Messys. Shortalls charges for taking down remaining walls to basement ceiling level, and for clearing site of old materials, less value of salvage.	}	39/19/3	39	19 3
"	Allow for cost of taking down walls in basement to foundation level and for removing chimney breast, and range etc. and clearing away debris ready for rebuilding operations.	}	20/-	20	0 0
"	Allow for Contractor's charges for making good to drainage for use of occupants in temporary building and fitting up Latrines and Lavatories etc. for temporary occupation to the satisfaction of the Corporation Authorities.	}	<i>No charge for this work.</i>		
"	Allow for Contractor's charges for building strong timber framework in Basement for temporary Kiosk, altering, readapting, and erecting Kiosk with new floor and roof to same, and painting and decorating Kiosk, fitting up with electric	}	<i>No charge for this work.</i>		

Forward

\$ 154. 12. 2.

Brought Forward

£ 154. 12. 2

Item. light etc. including value of Kloak supplied by Employer.

} " " " "

" Allow for Insurance of Workmen against loss of life or accidents under The Workmen's Compensation and Employers Liability Acts. (See end of Summary).

} Included at end of Summary.

" " "

" Allow for Insurance of Workmen under The National Insurance Acts, Parts I & II. (See end of Summary).

} do " " "

" Allow for Insurance of Premises against loss by Fire in an approved Fire Office. (See end of Summary).


} do " " "

" Provide for laying on water for the use of building work and paying all charges to the Corporation in connection with same.

} 20/- 1. 0. 0.

Carried to Summary

£ 155. 12. 2.

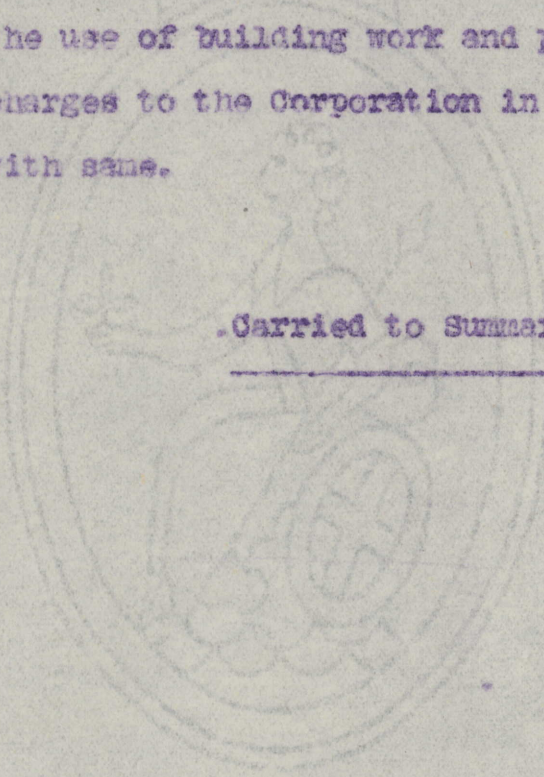

J. J. G. G.

. EXCAVATOR, CONCRETOR, BRICKLAYER.

Yards. Feet.				
46	Supr.	Taking up existing concrete floor in basement, and levelling over site to take new concrete.	9 ^d	1. 14. 6.
28½	Cube	Excavations for foundations at basement level including grubbing up old foundations (measured nett width of concrete) and carting away surplus earth.	3/6	4. 19. 9.
37	Supr.	Levelling and consolidating bottoms of foundations.	1 ^d	3. 1.
28½	Cube	Portland cement concrete gauged 6 parts of clean gravel and sand to 1 Portland Cement filled into trenches and lightly rammed.	25/-	37. 16. 3.
45	Supr.	6" thick Portland Cement concrete gauged 5 parts clean sharp gravel and sand to pass a 2" ring to one part Portland Cement, the upper inch being finished with crushed granite and cement 3 to 1 finely trowelled.	6/6	14. 17. 6.
	No. 1.	Extra labor and casing forming fair rebated perforation in concrete for manhole cover size 2 ft. 3" X 2 ft. 3".	4/-	4. 0.
	" 2.	Dishing to gullies.	9 ^d	1. 6.
15	Supr.	Taking up paving and 6" concrete vaulting under same over area at ground floor level.	1/2	15. 0
		<u>Forward</u>	8	55. 6. 4.

Brought Forward

£

55. 6. 7.

Yards.	Feet.				
15		Supr.	6" thick Portland Cement concrete, gauged as before, and reinforced with 3" mesh expanded steel, laid on and including strong temporary centering and horsing from basement a height of 7'6" prepared to take paving.	10/-	7. 10. 0.
		No. 2.	Extra labor and temporary casings to fair perforations for gratings size 2'3" X 3'0".	4/6	9. 0.
		" 2.	Do. do. but rebated for pavement lights average 2'8" X 3'0".	5/-	10. 0.
		51 Linl.	Forming chase in brickwall 4 1/2" X 6" for edge of concrete.	3d	12. 9.
3 1/3		Supr.	4 1/2" thick Portland Cement concrete gauged 5 to 1 fine aggregate filled in between and over R.S. Joists and prepared on top to take mosaic flooring, and include for temporary centering and horsing as before.	6/6	1. 1. 8.
1		"	4" Concrete all as last but finished smooth on top to mat space, and ditto. ditto.	7/6	7. 6.
2 1/3		Supr.	Marble mosaic floor to approved design P.O. per yard super laid over concrete with name "NOBLETT'S LTD." marked in same.	20/-	2. 6. 8.
14 1/2		Lin.	Concrete lintels 31" on soffite X 9 inches high gauged with fine aggregate and cement 4 1/2 to 1 filled in on temporary centering and casing, and	6/-	4. 7. 0.

Forward

£

77. 11. 2.

Yards.	Feet.		<u>Brought Forward</u>	£			
	14½	Lin.	reinforced with three Kahn bars, and include for cast and casings.				72. 11. 2.
	30	"	Concrete benching from lower flange of R.S. Joists about 6" high X 4" wide on one side and include for temporary casing.		6/-		15. 0.

BRICKWORK.

35½	Cube	Stock brickwork built with Dublin stock bricks in cement mortar to walls of basement.		40/-			41. 0. 0.
36 ⁷ / ₈	"	Do. do. as before but in walls of superstructure.		40/-			53. 11. 2.
6½	"	Labour forming openings.		2/6			16. 3.
7½	"	Extra on Stock brickwork for Chester firebrick in cement mortar to piers.		30/-			11. 5. 0.
334	Supr.	Cutting away face of old wall in area and lining same with brick in cement 9" thick average and bonding at back to old wall.		2/-			33. 8. 0.
18	"	Damp-proof course of asphalted felt laid over walls and lapped (measured nett)		3/-			2. 14. 0.
13	"	Do. do. but to vertical face of wall formed of slates close jointed and bedded in cement.		4/6			2. 18. 6.
14	Lin.	10 inch fireclay flue linings built into brickwork.		9/-			10. 6.

Forward

£ 249. 9. 7.

Brought Forward

\$ 249. 9. 7.

Yards. Feet.

84 Linl.

Labor plumbing to quoins.

1^d 7. 0.

No. 1.

Extra labor, cutting and waste to three ring segmental discharging arch over fire opening 5 ft. span and arch-bar.

} 7/6 7. 6.

" 1.

Gathering in upper portion of fire opening and forming throating to flue.

} 2/6 2. 6.

" 1.

Rendering back of fire opening 5 ft. wide in cement mortar.

} 2/6 2. 6.

" 1.

Setting Kitchen Range to a 5 ft. opening, forming all flues and exposed parts to fire with firebricks and blocks in fireclay mortar.

} 25/- 1. 5. 0.

5¹/₃

Supr.

Extra on stock brickwork for facing with best quality red Rusbon facing bricks pointed in cement.

} 7/6 2. 0. 0.

40 Linl.

Rake out joints of brickwork and wedge and point flashings in cement.

} 4^d 13. 4.

Item.

Attendance on plumber cutting out for and making good during fixing of sink, Lavatory Basin, W.C. Apparatus and pipes etc. in connection.

} 20/- 1. 0. 0.

Excavator, Concretor and Bricklayer.

Forward to Summary

\$ 255. 7. 5.

. CUT STONE.

Yards. Feet.

No. 6.	Granite templates size 9" X 9" X 6" finely chiselled on top and rough punched on beds and edges including setting in cement and building in 8" X 4" R.S. Joists over same.	} 5/-	1. 10. 0.
" 1.	Do. do. size 18" X 9" X 6" and building in pair of 8" X 6" R.S. Joists over.	} 7/-	7. 0.
" 2.	Do. do. size 18" X 18" X 6" and building in 15" X 12" compound girder over.	} 10/-	10. 0.
" 1.	Granite base stone size 18" X 27" X 6" thick, finely chiselled on top bed and closely punched on lower bed and edges, set in cement mortar and morticed on top for four lears bolts.	} 15/-	15. 0.
" 1.	Do. do. do. size 31" X 27" X 6" and do. do.	} 17/-	17. 0.
7 1/2 Lin.	9" X 6" granite door sills close grained, finely chiselled on face and close jointed all round, set flush in cement mortar.	} 4/6	1. 13. 9.
No. 3.	Extra for splayed jointed ends on last.	} 1/6.	3. 0.
71 Lin.	9" X 6" granite kerbing finely chiselled on face and one edge, close jointed at ends and back, rebated for iron gratings and set in cement mortar.	} 5/-	14. 15. 0.

Forward

£ 24. 0. 9.

Brought Forward

£ 24. 0. 9.

Yards. Feet.

94	Supr.	Relaying flagged pavement to foot- path, altering and rejointing where required and bedding and pointing in cement mortar.	} 1/6	7. 1. 0.
----	-------	---	-------	----------

51	Lin.	Neat junction of flagging outside line of area, with last including taking up and rejointing and relaying where required.	} 1/2	2. 11. 0.
----	------	--	-------	-----------

53	Supr.	3" granite flagging closely punched on beds and joints set in cement mortar over R.S. Joists and girder.	} 1/3	3. 6. 3.
----	-------	--	-------	----------

6 1/2	"	6 inch do. do. built into wall for corbelling to chimney breast.	} 2/6	16. 3.
-------	---	---	-------	--------

Carried to Summary

£ 37. 15. 3.

DRAINAGE.

Yards. Feet.

53	Lin.	5 inch extra glazed socketted drain pipes, laid on a bed of 4" concrete, cradled at sides and jointed with gaskin and cement, including excavations not exceeding 2'6" deep, and return, fill and ram.	} 2/3	5. 19. 3.
No. 9.		Extra on for bends.	} 2/3	1. 0. 3.
" 3.		Do. do. for single bevelled junctions.	} 3/4	10. 0.
" 2.		5 inch glazed deep seal fireclay gullies with 6" X 6" galvanised iron grating, set on a bed of concrete and jointed to drain.	} 10/-	1. 0. 0.
" 2.		4 inch "Hellyer's" traps (glazed) with 3" side inlets for wastes, and G.I. gratings at top, set on a bed of concrete and jointed to drain.	} 20/6	2. 5. 0.
" 2.		Extra for short taper pipes from 4" to 5" and connecting up.	} 3/-	6. 0.
" 1.		Manhole size 2'3" X 2'3" X 2'0" deep inside having 9" cement concrete bottom, and 9" brick walls in cement mortar, rendered over benching in cement, one 5" curved white glazed channel in bottom 2'6" long, and two-three quarter section do. do. bends over same, all set in concrete and benched up between in fine concrete rounded off and finished smooth in neat cement.	} 4/10/-	4. 10. 0.
		<u>Forward</u>	£	15. 10. 6.

Yards.	Feet.		<u>Brought Forward</u>	£	15. 10. 6.
No.	1.	Strong galvanised iron cover and frame to manhole size 2 ft. X 2 ft. set in tallow, in concrete perforation.	} 3/10/-		3. 10. 0.
"	1.	5 inch Broad's Stoneware Interceptor, set in concrete in manhole outer wall, and jointed to drain, and include for cutting into old wall and building in around Interceptor.	} 25/-		1. 5. 0.
Item.		Pay all charges and costs to the Dublin Corporation for continuing drain from last to sewer in Street for a length of about 15 feet and a depth of 12 feet.	} 7/10/-		7. 10. 0.
67	Lin.	4 inch H.M. coated vent pipe having caulked molten lead joints and fixing to face of wall with strong W.I. bands.	} 2/6.		8. 7. 6.
No.	4.	Extra on last for obtuse bends.	3/6.		14. 0.
"	2.	Ends of 4" pipe jointed to drain bends in cement.	} 1/6.		3. 0.
"	1.	Hunter Cowl and fixing.	4/-		4. 0.
"	1.	6 inch G.I. grating and cementing into flange of pipe.	} 2/6.		7. 6.
"	3.	Fair perforation through timber floors and ceilings for vent pipe and casing in same.	} 2/6.		7. 6.
"	1.	Do. do. through slating and lead gutter and flashing round same with 5 lbs. lead and leave staunch.	} 6/6.		6. 6.
			<u>Forward</u>	£	38. 0. 6.

Carried Forward

£ 38. 0. 6

Yards. Feet.

Item. Allow for testing the whole of the drains, traps, and ventilation pipes, with water test, and afterwards with smoke test, and leave same perfectly sound and in order to the satisfaction of the Architect and Corporation Authorities.

} 30/- 1. 10. 0.

Carried to Summary

£ 39. 10. 6.

Yards Feet

Carpenter and Joiner

175	Supr	Strong temporary casings to concrete rising walls,	} 3 ^d 5 ^d	2. 3. 9.
1	Cube	White deal lintel built in,		
3	"	White deal jamb blocks built into brickwork,	} 5 ^d	15. 0.
75	Supr	Strong timber grounds fixed securely to columns at about 18" centres to take casings,		4 ^d
82	"	Strong timber grading to sides and soffits of R. S. Joists	} 4 ^d	1. 7. 4.
106	"	Grading and bracketing fixed to compound girder to take fascia,		6 ^d
No.	25	Cast-iron brackets 15" long 4" X 3" built into wall to take top of fascia,	} 8 ^d	16. 8.

Floors.

104	Cube	White deal floor joists and tassels fixed at ground and first floor levels 3" X 3", 3" X 3", 4" and 4 1/2" X 3".	} 5 ^d	28. 17. 0.
9	lin.	Extra for bolting 3" tassels to lower flange of R. S. Joists with 4" X 3/4" bolts at 3 ft. centres,		6 ^d
16	"	Do, do to lower flange of compound girders, at 3 ft. centres and checking bottom of joists to fit over tassels,	} 9 ^d	12. 0.
51	"	2" X 2" herring bone strutting fixed between joists (measured through)		6 ^d

Forward S.

39. 19. 9.

Yards Feet		Brought Forward		
	No. 1	Extra labour trimming 3" joists for chimney breast size 3 ft. X 2' 3".	2/6.	2.6
	1	Do. do to Stairs Well size 6' 0" X 3' 0".	3/6	3.6
	1	Do. do. to Chimney breast and hearth on first floor, size 5' 0" X 3' 0".	3/6	3.6
Squares 2 1/4	Sqrs	1 1/2 red deal with one side tongued and grooved flooring in 5" widths, nailed to joists and cleaned off.	72/-	8.2.0.
6 1/2	Lin.	Diagonal cutting and waste on flooring.	3/-	1.7.
2 1/2		Circular cutting and waste on flooring.	4/-	.10.
7		2 1/2" X 1 1/2" mitred and glued margins.	6/-	3.6.
<u>Shallboard.</u>				
15	Cube	White deal beams and joists to Shallboard 7" X 2" & 3".	5/6.	4.7.6.
58	Sqrs	1" Red deal tongued & grooved flooring in narrow widths nailed to last and cleaned off.	7 1/2/-	1.16.3.
10 1/2	Lin	Diagonal cutting and waste on last.	2 1/2/-	2.3.
<u>Stairs.</u>				
No. 1		Red deal stairs 13ft. long on rake X 3' 3" wide in one straight flight	7/0/-	4.10.0.
			Forward S.	62.8.2.

Yards, Feet.

Brought forward &

62. 8. 2.

flight containing 12 treads and risers
with rounded nosings on treads and 1 1/2"
curb and wall string and strong
carriage pieces under

" " "

No. 1 4" X 4" Wrot square newel post about
4' 6" long, rounded on top and secured
to string of stairs,

10 1/2 10. 0.

7 1/2 5" X 3" wrot rounded top deal
handrail,

1/2 7. 0.

No. 1 End frame of handrail and

1/2 1. 0.

" 1 End handrail and secured to trimmer,

1/2 1. 0.

14 2" X 2" wrot square balusters about
3' 9" long and fixing to string and
handrail,

1/2 14. 0.

6 1/2 2" wrot and beaded apron lining
planted on trimmer,

10 5. 5

3 Do, do, but circular to an 18"
radius including ground at back.

1/3 2. 6

35 3" Wrot T. & C. soffite sheeting
and grounds.

6 17. 6.

27 1/2 1 1/2" Wrot both sides Red Deal
tongued & grooved sheeting to bulkhead
with 4" X 2" nosings and 4" X 2"
angle posts, all wrot on face,

1/6 2. 1. 3

6 1/2 Do, do but circular on plan to a
15" radius,

2 11. 0.

Forward &

67. 18. 10.

Yards Feet

Brought Forward A

67 18 10

10 Lin 6" X 1" beaded skirting planted on,

6^d

5 0

2 Do, do, but circular as before,

9^d

1 6

20 Supr 3" wrot both sides Red deal tongued and grooved top with ledges screwed to same on underside,

} 2 1/3

2 5 0

18 Lin Extra for wrot and slightly rounded edge to last,

} 3^d

3 3

2 Do, do, but circular as before,

4^d

8

No. 1 Extra on top for portion size 3' 0" X 3' 3" being framed to open as pair of lids fitted with strong wrot iron hinges,

} 10^d

10 0

Doors.

18 Supr 1" ledged and sheeted door

1/6

1 7 0

44 1/2 1 1/2" framed and sheeted doors filled in with 1" wrot 1, 2 & 6, sheeting,

} Nil

" " "

18 Lin, 4 1/2" X 3" wrot rebated and beaded frames.

} 1/2

18 0

No. 1 Doors fitted and hung with 1 pair 15" toe hinges

} 2/6

2 6

3 Do, do, with one pair 4" butt hinges,

Nil

" " "

1 Japanned Norfolk latch & fix

2/-

2 0

1 6" Tower Bolt & fix,

1/2

1 0

3 9" Stock locks and fix,

Nil

" " "

2 Ends of frames fitted with spuds and morticed to concrete,

} 1/2

2 0

54 Lin 3 1/2" X 1/2" chamfered architraves planted on frames and mitred,

} Nil

" " "

Forward A

73 16 9

Yards Feet

Brought forward &

73 16 9

Window.

10	Supr.	2" rebated and milled four pane sash,	1/6.	15-0.
16	Linn	4 1/2" X 5" rebated and milled frame,	1/4	16-0.
3 1/2	Linn	6" X 1" rounded window board rounded on edge and tongued to frame	} 8d	2 4.
30 1/2		3" Scotia milled angle fillet planted on and mitred,	} 2d	1 9.

Cupboard.

11	Supr.	1 1/2" wrot and panelled cupboard front,	} 2/.	1 2-0.
16	Linn	3" X 2" Wrot and beaded frame	8d	10-8.
No.	1	Door fitted and hung with one pair 3/4" butt hinges,	} 2/9.	2 9.
	1	Brass hornbuckle and fix	1/3.	1-3.
	1	4" Cupboard lock,	1/6.	1-6.
12	Supr.	1" Sheeted enclosure including rails,	} 1/3.	15-0.
7		1" Wrot deal shelves and cleats to cupboard,	} 1/2	7-0.
2		Do, do, but including bearers	1/3.	2-6

Shelving in Basement

173	Supr.	1 1/2" white deal shelving tongued and wrot on exposed faces, fixed to trestles separately given.	} 1/-	8 13-0.
-----	-------	---	-------	---------

87 7 6

, Forward &

Yards	Feet		<u>Brought forward</u>	S	
					87. 7. 6.
9	Lin.	3" X 2" wrot and chamfered cleats plugged & fixed to wall,		4 ^d	3. 0.
49		3" X 2" wrot deal wall pieces plugged and fixed to wall,		8 ^d	1. 12. 8.
70		3" X 1 1/2" Wrot jibs and plates framed to last,		6 ^d	1. 15. 0.
No. 6		Extra for quadrant ends on shelving,		6 ^d	3. 0.
12	Lin.	Extra labour to splayed ends,		2 ^d	2. 0.
34	Supr.	Lattice shelving with 3" X 1 1/2" laths at 4" centres, wrot all round,		1/-	1. 14. 0.
13 1/2	Lin.	3" X 2" wrot chamfered cleats as before,		4 ^d	4. 6.
7		3" X 2" wrot deal wall pieces as before,		8 ^d	4. 8.
9		3" X 1 1/2" wrot framed jibs & plates		6 ^d	4. 6.
No. 33		Rowntree's confectionery cases fitted up in basement,		4/-	6. 12. 0.
<u>Shop Front and Entrance</u>					
<u>Doors to Shop.</u>					
42 1/2	Supr.	1" red deal sheeting nailed to bearers before taken over fascia, and traversed for lead,		9 ^d	1. 11. 11.
1 1/2	Lin.	Mitred angle on last,		2 ^d	. . 3.
4		1 1/2" rounded deal rolls planted on last,		4 ^d	1. 4.
<u>Spanish Mahogany wrot on all exposed faces.</u>					
61	Supr.	1 1/2" fascia board, with deal ledges screwed to back and fixings,		3/-	9. 3. 0.
					110. 19. 4.
			<u>Forward</u>	S.	


Yards Feet

Brought Forward \$

110. 19. 4.

to bracketting before taken

No.	2	Lin	Mitred angle on last,	6 ^d	1. 0.
	36 ¹ / ₂		8" X 1 ¹ / ₂ " wrot fascia over last to sunblind, ledged at back as before,	} 7 ^d	3. 13. 0.
No.	1		Mitred angle on last,	6 ^d	. 6.
	73	Lin	3 ¹ / ₂ " X 1 ¹ / ₂ " moulded fillets to last, top and bottom,	} 1/6.	5. 9. 6.
No.	2		Mitres on last,	6 ^d	1. 0.
	35	Lin	6" X 1 ¹ / ₂ " molded soffite planted on over head of frame.	} 7/3.	3. 18. 9.
No.	1		Mitres on last,	6 ^d	. 6.
"	2		Built up Consoles 18" on face, 21" projection and 4 ft. high, shaped, molded and fluted on face, with sunk and molded panel over plain at sides, and covered with red deal sheeting and roll to take lead covering, as sketch, (right and left hands).	} 3/15.	7. 10. 0.

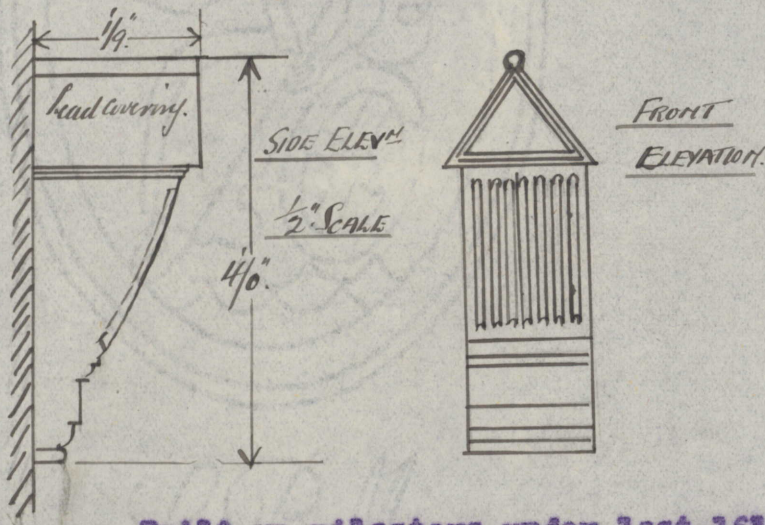

No.	2		Built up pilasters under last 16" on face X 9' 6" high having molded base and returns, 15" high sunk panel and molded returns each side over, to take letters,	} 3/10.	7. 0. 0.
-----	---	--	--	---------	----------

Forward \$

138. 13. 7.

Yards	Feet		Brought forward	£.	138	13	7
		and small raised and molded panel at top under Consoles.					
No.	4	Do, do, all as last but without returns, fixed to four sides of angle column. (Note grounds before given)		3/-	12	0	0
38	Lin.	Tongued and mitred angles on last.		3/-		9	6
29		1½" molded base under sill to Stallboard about 15" high, fixed to grounds and scribed to pavement.		5/-	7	5	0
No.	4	Scribed ends on last.		6/-		2	0
"	2	Mitres to do.		9/-		1	6
63	Lin.	3" X 3" rebated, beaded and rounded shop sash, grooved for lining & French polished as before.		7/3	7	1	9
30		3½" X 3" rebated, molded and weathered sill & do, do.		7/9	4	2	6
16½		3" X 3" twice rebated, beaded and rounded and square mullions as sketch & do, do.		2/6	2	1	3
16½		Do, do, all as last but to angle mullions & do, do.		2/6	2	1	3
No.	4	Tee iron stiffeners 1½" X 1½" about 8' 6" long, drilled and countersunk & fixed with brass screws at back of mullions & screwed at top and bottom to casing & sheeting.		10/6	2	2	0
16½	Lin.	Birdsmouth checking to back of jambs to take door frame.		3/-		4	2
151	Lin.	1" X 5" molded mahogany glazing slips fixed with brass cups and screws and mitred.		4/-	2	10	3
			Forward	£.	148	14	9

Yards Feet

Brought Forward £

148. 14. 9.

42 Supr 2 1/2" sash doors molded in solid on one side and fitted with molded slips, mitred on other side as before in single panels to take glass & lower panel solid & molded & rounded on edges to swing & include for French polishing. } 6/8. 14. 0. 0.

24 Lin. 4 1/2" X 4" rebated molded & beaded frame, checked at back and screwed to window frame. } 4/- 14. 16. 0.

No. 2 Sets of "Smiths" patent brass swing door hinges with steel coil springs, & top shoe & guide & include for forming recess in concrete floor and fixing hinge box in same & oiling & hanging doors on same. } 3/1- 6. 0. 0.

" 2 12" Brass flush bolts & fixing in door. } 5/- 10. 0.

" 2 Heavy polished brass shop door handles & fixing on doors. } 13/6. 1. 5. 0.

" 1 Best quality shop door brass mortice lock, with set of ebony handles and nickelled plated fittings on same & fixing on door. } 30/- 1. 10. 0.

24 Lin 3/4" rounded angle fillet planted on against frame and mitred. } 3d. 6. 0.

136 Dwp 2 inch rebated molded and beaded skeleton framing fitted with molded and mitred slips to screen off Stallboard, including transom rail head and sill and French polishing. } 3/- 20. 8. 0.

Forward £

227. 9. 9.

Yards	Feet		Brought forward	£.	227. 9. 9.
	No. 1	Extra on last for single door size 2' 6" X 6' 0", prepared for glass rebated and fitted to screen framing, hung with 3" brass butts and fitted with spring latch and handle,	2/5/-		2. 5. 0.
	5.	Do, do, for pair of doors similar size per pair, with rebated and beaded meeting rails, both doors hung with brass butts, fitted with two small brass barrel bolts and one spring latch as before,	2/5/-		13. 15. 0.
43½	Supr.	2 inch framing as before but fitted with 5/8" mahogany panels, wrot both sides and French polished,	6/8.		14. 10. 0.
26		Do, do, all as last but wrot & French polished on one side only and grounds at back,	6/-		7. 16. 0.
16½	Lin.	Tongued and mitred angles on Screen framing,	3d.		4. 2.
25		3½" X 1" rounded mahogany nosing planted on joists under Stallboard Screen,	9d.		18. 9.
No. 2		Mitred and rounded ends,	4d.		. 8.
29	Supr.	1" wrot & polished mahogany riser planted on edge of joists and bearers,	7/6		3. 12. 6.
No. 48		Plain block letters in mahogany bevelled on edges size about 9" X 7" and fixing on face of panels of pilasters (NOBLETT'S)	9/-		21. 12. 0.
6		Do, do, inverted commas to last,	2/-		12. 0.
		Forward	£.		297. 15. 10.

Yards Feet

Brought Forward

£

297.15.10.

No.	16.	Plain raised block letters all as before but size about 16" X 12" and fixing with brass screws to fascia (NOBLETT'S)	} 15/-	12. 0. 0.
	2	Plain inverted commas to last,	2/6.	5. 0.
	2	Best quality spring roller Sunblinds and about 16 ft. long, over small cover blind over steel spring with metal barrel, and best sailcloth blind, fitted with W. I. brackets extra strong wrought iron hinged arms on same, and strong pulls, (Fascia to front before given)	} 11/-	22. 0. 0.

Internal Fittings.

350	Supr.	1 1/2" skeleton mahogany framing molded and rebated to take mirror, with pine backs, including grounds and fixing to walls and polishing marginal framing.	} 2/9.	48. 2. 6.
32	Lin.	Tongued and mitred angles on framing.	} 3d.	8. 0.
75	Sup.	1 1/2 inch wrought one side mahogany panelling molded including French polishing and grounds plugged and fixed to wall,	} 4/9.	17. 6. 9.
12	Lin.	Tongued and mitred angles on last,	3d.	3. 0.
35	"	3 X 1 1/2" molded capping to last French polished,	} 1/3.	1. 11. 3.
No.	9	Mitres on last.	6d.	4. 6.
	1	Returned mitred end.	9d.	. 9.
31	Lin	4 1/2" X 1" molded mahogany base planted on framing and French polished,	} 1/3.	1. 18. 9.
No.	2	Scribed and fitted ends,	4d.	. 8.
"	9	Mitres on base,	6d.	4. 6.

Forward

£

397. 1. 6.

Yards	Feet		Brought forward	S.	
	87½	Sup.	1½ inch wrot both sides mahogany shelving French polished on soffite end and margins to top, fixed on cleats separately taken.	3/-	13. 2. 6.
	2½	Lin.	Chip lap on do.	4 ^d	10.
No.	5		Cheeking out shelving about 2ft. X 1ft. and returning end 7" wide to column casing.	1/-	5. 0.
	10		2½" X 1" wrot and molded mahogany cleats French polished about 13" long, returned at end & screwed to framing with brass screws.	9 ^d	7. 6.
No.	15		Do, do, do, but 18" long & do.	1/2.	17. 6.
	15		3" turned mahogany pillars about 14" long with turned caps and bases and fixing under shelves.	4/-	3. 0. 0.
	2		Polished brass shelf brackets about 12" X 12" screwed to shelving and framing under.	5/-	10. 0.
	6	Lin.	9" X 1" wrot all round mahogany shelving French polished.	1/10.	11. 0.
	2½	"	Do, do, but circular to an 18" radius on plan.	2/6.	6. 3.
No.	6		Japanned brackets size about 8" X 6" screwed to sheeting and shelving.	2/-	12. 0.
	21	Supr.	¾" wrot T.&G. ceiling in narrow widths, nailed to floor joists over and grounds.	8 ^d	14. 0.
	14	Lin.	Raking cutting and waste on ¾" sheeting.	2 ^d	2. 4.
	33	Sup.	1½ inch skeleton mahogany framing molded and rebated as before with pine backs to take mirrors and grounds fixed to soffite of joists.	7/9.	4. 10. 9.
			Forward	S.	422. 1. 2.

Yards Feet

Brought Forward

8

477. 1. 2.

3½	Lin	Extra for end of last framed on rake,	} 1/-	3. 6.
49	"	¾" angle fillet planted on and mitred as before,	} 4 ^d	16. 4.
20	Supr.	¾" wrot white deal I. & G, sheeted ceiling papered over with stout lining paper.	} 9 ^d	15. 0.
<u>Counter & Drawers & Desk.</u>				
21	Supr	1½" wrot and cross tongued mahogany counter top. (French polished) and including deal ledges screwed on under-side,	} 3/6.	3. 13. 6.
12½	"	Do, do, but circular on plan to a 7' 6" radius & do, do.	} 4/8.	2. 18. 4.
9	Lin	Extra for molded nosing on counter top with 3" X 3" bed molding under same,	} 1/6.	13. 6.
5	"	Do, do, but circular to a 6 ft. radius,	} 2/-	10. 0.
No. 1		Extra for slaped flap size about 3 ft. X 3 ft 6" hinged with brass flap hinges and rebated to counter top and fitted with bolt,	} 7/6.	7. 6.
6		Framed skeleton trestles red deal 3" X 1½" size about 2ft. X 5 ft. and fixing under counter top,	} 2/6.	15. 0.
12	Supr	1 inch wrot I. & G, red deal sheeting nailed to last at ends,	} 8 ^d	8. 0.
25	Supr	1 inch white deal shelving wrot on top and edges checked and fitted to trestles,	} 8 ^d	16. 8.
20		Do, do, but circular to a 7' 6" radius,	10 ^d	16. 8.

Brought Forward

£ 434. 15. 2

Yards. Feet.

13	Lin.	3" X 1" wrot deal cleats screwed to trestles to take shelving.	3 ^d	3. 0.
25	Supr.	1 1/4" inch panelled and bolection moulded mahogany counter front fixed to grounds and trestles before taken and include for French polishing.	5/-	6. 5. 0.
14	"	Do. do. but circular on plan to a 6 ft. 6" radius.	6/8	4. 13. 4.
8 1/2	Lin.	4 1/2" X 1" moulded mahogany base planted on panelling.	1/3	10. 8.
4 1/2	"	Do. do. but circular as before.	1/8	4. 6.
No.	1.	Mitre on last.	6 ^d	. 6.
"	1.	Returned mitred end.	9 ^d	. 9.
"	3.	Drawers size about 2 feet wide, 2 feet deep and 8 inches high with one inch Mahogany front, 1/2 inch red deal sides and bottom all dovetailed together and including hardwood runners screwed to trestles.	12/-	1. 16. 0.
"	1.	Extra for fitting up one drawer with three beechwood cash-bowls and one space for notes.	15/-	15. 0.
"	6	Brass drawer pull handles and fix.	1/-	6. 0.
"	3	" drawer locks and fix.	3/-	9. 0.
13 1/2	Lin.	6" X 1" Mahogany shelves wrot on all faces and French polished fixed to brackets separately given.	1/3	16. 11.
No.	4.	Returned ends on last.	5 ^d	1. 8.
"	6.	Brass Rods about 1/2 inch diamr. with rose ends and screwing to sash frame 2 feet long.	5/-	2. 0. 0.
"	1.	Brass Rod about 12 feet long 1 inch diameter and rose ends and screwing to ceiling framing.	23/-	1. 3. 0.

Forward

£ 454. 3. 6.

Yards, Feet.

DESK AND SHOWCASE.

No. 1. Mahogany Counter desk about 2'0" X 2'6" X 8" high in front with rounded nosing to projecting top and neatly moulded and panelled screen around sides and front, fitted with slips to take glass about 1 ft. 8" high with moulded capping on same mitred, and two small stationary drawers fitted with divisions, and panelled and moulded Cabinet under about 3 ft. 2" high on sides and front, with moulded capping and bed mold and moulded base all French polished.

13/10/

13. 10. 0.

" 1. Moulded sash door size about 2'0" X 5'9" framed in last including rebated and moulded hanging style and stop, upper portion fitted with mitred glazing slips, hung with 3 inch brass butts and fitted with 4 inch brass bolt and brass latch.

4/10/

4. 10. 0.

" 1. Mahogany Show case 8 ft. 8" long, 11 inches wide X 8 feet high having moulded and rebated Skeleton framing fitted with slips, glazed with polished plate glass with one bent quadrant end with four rebated and moulded dust proof doors in same hung with brass butts and fitted with brass spring latches and handles. 1 inch red deal bottom and bearers with mahogany moulded base on outside and glazed pedestal over with sash doors in

50/1/

50. 0. 0.

Forward

£

522. 3. 6.

Yards. Feet.

same, and panelled and veneered quadrant and with Mahogany inner lining to top, and moulded cornice around same and fitted up inside five tiers of plate glass shelves in two widths rounded on front edge and ends and polished, and supported on brass angle brackets, also mahogany shelf to pedestal. (Price to include for Show Case complete but without mirrored back).

$\frac{3}{8}$ inch polished plate glass shelves rounded and polished on front edge and ends and square at back fitted and fixed on brackets separately given.

No. 4.	Plate glass shelves as described 3 feet long X 3 inches wide.	} 8/6.	1. 14. 0
" 22.	Do. do. 3 feet long X 6 inches wide.	10/6	11. 11. 0.
" 4.	Do. do. 3 feet long X 11 inches wide.	} 15/-	3. 0. 0.
" 8.	Strong polished brass angle brackets, size about 4" X $3\frac{1}{2}$ " with rib on top outer edge screwed to framing or brass rods separately given.	} 2/3.	18. 0.
" 40.	Do. do. but 7" X 7" and ditto. do.	3/4	6. 13. 4.
Item.	Allow for attendance on Plumber cutting out for and making good after same as required, fixing sink, Lavatory basin and W. C. Apparatus.	} 15/-	15. 0.
"	Allow for attendance on Gas-fitter as described fitting up gas pipes in Shop and Cellar.	} 15/-	15. 0.

Forward

\$

547. 9. 10.

Brought Forward

£ 544. 9. 10.

Yards. Feet.

Item. Allow for attendance on Electrician
as described, fitting up 55 lamps to
41 Electric points and wiring.

} 20/- 1. 0. 0.

PROVISIONAL.

Item. Provide for the erection and
maintenance of dust proof screens and
partitions inside building with
necessary doors and windows in same,
to allow the business in shop to be
proceeded with during the building
operations over and for taking down
and removing at completion.

} 20/- 20. 0. 0.

JOHN W. DONNEL & CO. LTD.

SWIFT BROOK

Carried to Summary

£ 568. 9. 10.

PLUMBER, IRONFOUNDER, GASFITTER,
AND ELECTRICIAN.

Cwts.	Feet.				
5 ³ / ₈		Milled sheet lead and laying over fascia board, dressed down over boards and rolls and seating to girders.	52/6	14	2.3
45	Lin.	Extra labor dressing lead over edge of fascia covering and copper nailing.	4 ⁰ / ₋	15	0.
No. 5.		Bossed ends to rolls.	9 ⁰ / ₋	3	9.
4 ⁴ / ₇		R. S. Joists 8" X 4" X 18 lbs. set at ground floor level over basement.	30/-	6	14.2
6 ³ / ₇		Do. do. size 8" X 6" X 35 lbs. set at first floor level under chimney breast.	30/-	9	12.10.
54 ¹ / ₂		R. S. compound girder 15" X 12" built up with two 14" X 6" X 57 lbs. R.S.J's. and one 12" X 1/2" plate top and bottom rivetted on, hoisted and set at first floor level.	36/-	98	2.0.
"	2.	Mitred ends on last.	5 ⁰ / ₋	10	0.
No. 4.		Holes drilled through lower flange of 8" X 6" R. S. Joists and bolting down to column cap with 3" X 5/8" bolts, nuts and washers.	5 ⁰ / ₋	1	0.0.
"	4.	Do. do. through lower flange and plate of compound girder and bolting down to column cap with 3 1/2" X 5/8" bolts as before.	6/-	1	4.0.
"	4.	Ends of 8" X 4" R. S. Joists notched top and bottom flanges plated with two standard angle cleats rivetted on and bolted to web of similar section, including all drillings.	12/6	2	10.0.

Forward

\$

134.17.0.

Brought Forward

£ 134. 17. 0.

Yards. Feet.

No. 2.	Ends of 8" X 8" R.S. Joists plated with two standard angle cleats rivetted on and bolted to web of compound girder with 3" X 3/4" bolts as before.	12/6	1. 5. 0.
" 2.	10" X 1/2" wrought iron fishplates average 2 1/2 feet long, bent to angle of mitre, and bolted through compound girder with 3" X 3/4" bolts (separately taken.)	17/6	1. 15. 0.
" 10	3" X 3/4" round iron bolts and nuts and washers and include for two holes to each bolt through compound, and two through fishplates and bolting up.	3/6	1. 15. 0.
" 2.	C.I. columns 8" external diam. 1 inch metal with 15" X 15" X 1 1/2" base plates and 12" X 12" X 1 1/2" caps. 10 ft. high overall, and include for hoisting and setting same at ground floor level, and securing to granite base stones before taken, with 4 rag bolts leaded in. Weight per column 7 1/2 cwt.	9/15/-	19. 10. 0.
54 Supr.	Hayward's prismatic pavement lights having 4" X 3" X 3 1/2" lenses set in cast iron frame, and chequered margins, and include for setting same in cement to rebates of granite kerbing before taken.	12/-	37. 8. 0.
54 "	Strong galvanized wire guards and fixing under last.	10/-	7. 5. 0.

* Forward £ 193. 15. 0.

Brought Forward

£ 193. 15. 0

Yards. Feet.

No. 2. Collapsible gates about 3'6" wide X 5 ft high fitted with all necessary top and bottom rails, rollers, locking arrangement complete and fixing same to Porch Entrance.

} Mil. " " "

" 2. W. I. grilles about 2 ft. wide X 3'9" high and securely fixing to outer frame of windows in Porch Entrance.

} " " " "

" 1. Kitchen range to a 5 ft. opening with large oven, boiler skirtings, warming plate and dampers etc. all complete for setting.

} 20/- 20. 0. 0.

" 1. Cast iron shelf over last, about 6 ft. long X 7" wide with frieze under same and fixing across opening.

} 20/- 1. 0. 0.

" 1. Brass mat frame size about 4'9" X 1'9" with rounded edges and setting same in floor.

} 3/15/- 3. 15. 0.

SANITARY PLUMBER.

Item. To estimate for supplying and fixing new W.C. apparatus complete with seat, cistern and flush pipe, also fitting up new lavatory basin, and lead lined sink with cold water supply pipes and taps and lead waste pipes and traps to discharge into drain traps and bends.

} 27/10/- 27. 10. 0.

Forward

£ 246. 0. 0.

Brought Forward

£ 246. 0. 0.

Yards. Feet.

GAS SUPPLY.

- | | | | |
|-------|---|---------|-----------|
| Item. | To cost of a 20 light dry meter and fixing in basement by Gas Co., and including necessary platform and sheeted enclosure to same. | } 5/1- | 5. 0. 0. |
| " | To estimate for 3" brass gas rail about 15 ft. girth with bends and ceiling roses on same, detachable, and gas piping and jets in same and fixing all complete in Shop, also gas piping and lights in basement. | } 20/1- | 20. 0. 0. |
| " | To cost of brass gas rail outside Shop window about 12 ft. long with three long bent branch arms on same and jets and burners complete. | } 6/1- | 6. 10. |

ELECTRIC LIGHTING.

- | | | | |
|-------|--|-----------|--------|
| Item. | To cost of meters destroyed, also services and other apparatus destroyed, the property of The Dublin Corporation. | } 7/1- | |
| " | To cost of wiring with best quality insulated wires in steel tubes to 41 separate points, in Shop and Basement, supplying 59 lamps and fixing, including 59 lamp-holders and flexible wire from ceiling roses, etc., all complete. | } 52/10/- | 10. 0. |

Forward

£

Brought Forward

£ 336. 10. 0.

Yards, Feet.

Item. To cost of heavy brass rails about
 12 ft. total length to take electric
 wires and top lights, with large plugs
 and including fixing from mirrored
 ceiling with brass brackets etc. complete.

} 30/- 1. 10. 0.

Carried to Summary

£ 338. 0. 0.

PLASTERER.

122	Supr.	Render, float and set on brick-work and twice lime whiten walls.	} 1/6.	9. 3. 0.
8 1/2	"	Skim and set with putty and plaster to soffite of concrete vaulting.	} 9/-	6. 5.
58	Lin.	3" narrow return on last including arris.	} 6/-	1. 9. 0.
28 1/2	Supr.	Lath plaster float and set ceiling.	1/9.	2. 9. 10.
19	"	Cement plaster narrow to back of range opening.	} 6/-	9. 6.
255	"	Molded ribbed and panelled fibrous plaster ceiling to special design, including timber grounds at back of same and fixing same in position and finishing with Keene's Cement.	}	60. 0. 0.
67	Lin.	Molded Mahogany French polished cornice about 15" girth, including bracketting grounds and fixing complete.	} 3/-	10. 1. 0.

Forward

£ 83. 18. 9.

Carried Forward

£ 83. 18. 9.

Yards. Feet.

No.	7/8	Mitres on last.	3/-	1. 1. 0.
32	Lin.	Strong timber grounds fixed over top of screens at back of cornice to take bracketting.	} 6/-	16. 0.
Item.		Allow for making good to fibrous plaster ceiling after Gasfitter and Electrician, also attendance on same boring through ceiling for pipes &c.		
			} 20/-	1. 0. 0.

Carried to Summary

£ 86. 15. 9.

GLAZIER AND PAINTER.

8 1/2	Supr.	21 oz. sheet glass and glaze sashes with putty.	} 10/-	7. 1.
111 1/2	"	1/4" British polished plate glass and glaze screens bedded in putty and sprigged.		
30 1/2	"	3/8" Polished plate as before and glaze shop windows, fixed with slips before given in 2 panes, 8 ft. high.	} 4/-	6. 2. 0.
193	"	Do. do. but in four panes up to 8 ft. high.		
21 1/2	"	Do. do. but glazed in wash leather to doors in panes up to 6'6" high.	} 4/-	4. 6. 0.

Forward

£ 67. 9. 5.

Carried Forward

£ 67. 9. 5.

Yards. Feet.

110	Supr.	$\frac{1}{4}$ " polished plate with silvered backs to mirrors and fixing in framing before taken in heights up to 5'8" in 13 panes.	} 4/-	22. 0. 0.
34	"	Do. do. but in one pane up to 5'8" high.	} 4/6	7. 13. 0.
64 $\frac{1}{2}$	"	Do. do. all as last but in panes up to 7'8" high in nine panes.	} 4/-	12. 18. 0.
10	"	Do. do. as last but in panes up to 8'8" high, in one pane.	} 4/-	2. 0. 0.
105	"	Do. do. all as last but in three panes.	} 4/6	23. 12. 6.
25	"	Do. do. but fixed to rebates of framing to ceiling $\frac{1}{4}$ " plate silvered at back.	} 4/3.	5. 6. 3.
13 $\frac{2}{3}$	"	Do. do. but in one pane.	3/9.	6. 3.
13 $\frac{1}{2}$	Lin.	$\frac{1}{4}$ " wide bevelled margins to mirrors.	} 1/6.	1. 0. 3.
	Item.	Allow for casing up lower portion of mirrors temporarily during completion of work for protection for a length of 15 ft. X 5 ft. high and removing at completion.	} 25/-	1. 5. 0.
	"	Clean the whole of the exposed faces of glass and polish and leave the whole perfectly sound at completion.	} 20/-	1. 0. 0.
57	Supr.	Knot, prime, stop and three coat paint woodwork, finished approved tints.	} 1/4.	3. 16. 0.
8 $\frac{1}{2}$	"	Extra for finishing mahogany grained and varnishing.	} 1/6.	12. 9.

Forward

£ 148. 19. 5.

Carried Forward

£ 148. 19. 5.

Yards, Feet

37	Supr.	Clean off rust and three coat paint with Oxide paint on R. S. Joists.	} 9d	1. 7. 9.
11	Liz.	Do. do. on 1½" X 1½" T. irons.	} 2d	1. 10.
No. 2.		Do. do. on C.I. columns 8" diam. X 10 ft. long with 15" X 15" bases, and 12" X 12" caps.	} 7/6	5. 0.
" 4.		Do. do. on Pavement lights Size 4'0" X 3'8" on both sides.	} 7/6	10. 0.
" 1.		Clean and black kitchen range and shelf and frieze over same with black Japan.	} 2/6	2. 6.
Item.		Properly cleaning relief ceiling in Shop and the cornices around same finished in Duresco, white and stippled.	} 6/1	6. 0. 0.
"		Preparing and painting fascia board, pilasters &c. on outside of Shop, gilding 64 letters, and twice varnishing over same with best carriage varnish, painting to be finished in shade and color as before to match mahogany sashes, gilding portion on same with best gold leaf and raised letters before described in the best manner.	} 14/1	14. 0. 0.
"		Lettering "NOBLETT'S TOWER" in gold leaf and shading in 9" letters to counter front.	} 2/2	2. 2. 0.

Forward

£ 143. 8. 6.

Brought Forward

£

143. 8. 6.

Yards. Feet.

ADDENDA.

1 inch circular brass cased standards with rose ends on same and fixing to floor and ceiling to take brackets supporting glass shelves.

No.	12	Do. do. but 8 ft. long overall.	14/-	10. 4. 0.
"	4	Do. do. but 9 ft. long overall, with an end bent at top for fixing to framing under cornice.	} 20/-	4. 0. 0.

WALL TILING.

28	Supr.	8" X 8" White glazed tiling fixed to walls including cement rendering to back of same.	} 21/-	29. 8. 0.
15	Lin.	Circular cutting and waste on tiling.		
	Item.	Clear away all rubbish, clean and wash down the whole of the Premises and leave same in a clean and habitable condition.	} 21/-	2. 0. 0.

Carried to Summary

£

219. 8. 0.

CREDIT.

Cwts.

10		Old R.S. Joists saved from taking down.	} 2/6.	1. 5. 0.
54		Old Compound girders and plates do. do.		
15		Old cast iron Columns do. do.	2/6.	1. 17. 6.

Carried to Summary

£

15. 5. 6.

SUMMARY OF TRADES.

1	Pages						155. 12. 2.
	to	4			Preliminaries.		
5	"	8			Excavator and Concretor,)		255. 7. 5.
					Bricklayer.)		37. 15. 3.
9	"	10			Cut Stone		39. 10. 6.
11	"	13			Drainage		568. 9. 10.
14	"	29			Carpenter and Joiner.		
30	"	34			Plumber, Ironfounder, Gasfitter)		338. 0. 0.
					and Electrician.)		
34	"	35			Plasterer.		86. 15. 9.
35	"	36			Glazier and Painter.		219. 8. 0.

£ 1700. 18. 11.

ADD.

	To	Insurance of Workmen against Accidents and Loss of Life.				
		Insurance of Workmen under The National Insurance Acts.	}	3%	51. 0. 0.	
		Insurance against Fire Loss				

£ 1751. 18. 11.

ADD.

		Surveyor's Fees for preparing Bills of quantities $1\frac{1}{2}$ per cent.			26. 5. 7.
		Lithography of Bills of Quantities.			6. 0. 0.
		Architects' fees for preparing Plans, Specification and supervising, 5 per cent.	}		87. 12. 0.

1871. 16. 6.

CREDIT.

		Value of Salvage in R.S. Girders, Joists & C. I. Columns.			15. 5. 6.
--	--	---	--	--	-----------

Total £ 1856. 11. 0.

BILL OF QUANTITIES FOR WORK
REQUIRED TO BE DONE IN REBUILDING
WALLS ETC. AND REINSTATING SHOP
FRONT AND FIXTURES ETC. TO
BASEMENT AND GROUND FLOOR OF NO.
34 LOWER SACKVILLE STREET, DUBLIN,
DESTROYED DURING "THE REBELLION"
OF APRIL 1916.

FOR

MESSRS. NOBLETT'S LIMITED

HOUGHTON STREET,

LIVERPOOL.

ARCHITECTS:

CALDECK & DUNLOP, M.M.R.I.A.I.,

2 SAINT ANDREW STREET,

DUBLIN.

SURVEYOR:

Francis P. Hall. F.S.I.

3 WESTMORELAND STREET,

DUBLIN.

AUGUST 1916.
